


PixPoster LED

Wider, Bigger, Show More, Landscape 16:8

Application

- Retail
- Shopping Mall
- Hall
- Conference
- Exhibition
- Airport
- Railway station
- Metro
- Cinema
- Supermarket
- Church
- Property

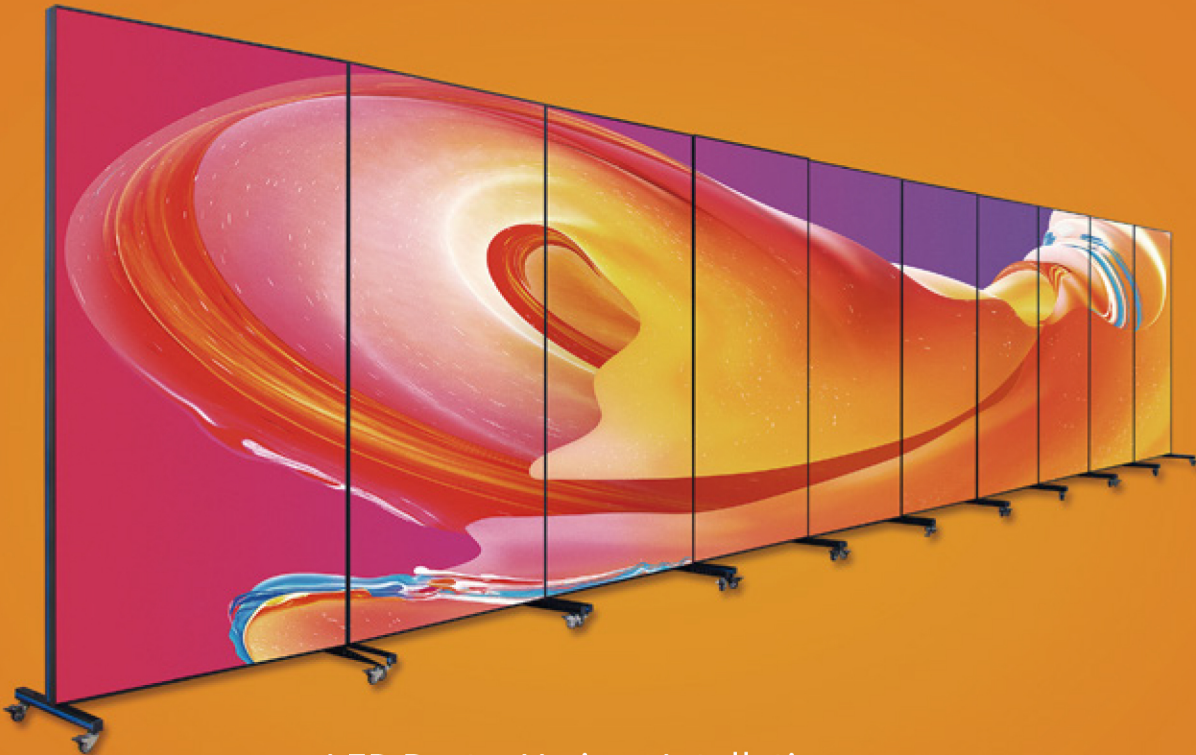

LED Poster Various Intallation

A: Portrait



Stand & Move Ceiling Mounted Wall Mounted

B: Landscape



Ceiling Mounted
Wall Mounted

C: Cascade



10pcs LPosters Cascade

Parameter

Pixel Pitch(mm)	1.86	2	2.5	2.5
Pixel Matrix Per Sq.m	288,888	250,000	160,000	160,000
Pixel Configuration	SMD1515	SMD1515	SMD1515 / SMD2121	SMD1921
Scan	1/43	1/40	1/32	1/32
Power Con. (Max / Avg)	1800 / 360 W	1800 / 360 W	1800 / 360 W	1800 / 400 W
Resolution (962/642/1282)	(516/344/688) x 1032	(480/320/640) x 960	(384/256/512) x 768	(384/256/512) x 768
Receiver Card	A5S PLUS	A5S PLUS	A5S PLUS	A5S PLUS
Brightness (nits)	1000	1000	1000	5000 (Shop window, face sunlight directly) Contrast 3000:1
Born for Shop Window	Poster 1.8/2/2.5mm with 962/642/1282mm wide & 1000/2000/5000 high brightness make Shop Window in infinite solutions.			
Audio & Music Integrated	Amplifier and Speaker Integrated (an Audio LED Poster)			
Power Supply	CL / Meanwell			
Material	CNC Aluminum Profile with 0.01mm tolerance			
User Experience	Plug & Play & Enduser Level			
Default Installation	Simplified & Stable Movable Standing Base Support			
Various Installation	Standing, Hanging, Wall Mounted, Rental, Cascade (All Optional)			
Aspect Ratio (977 option)	Portrait 1:2 or Landscape 2:1 (close to16:9)			
Module Dimension	320x160mm / 1.05x0.52ft			
Display Dimension	960 / 640 / 1280 x 1920mm OR 3.15 / 2.1 / 4.2 x 6.3ft			
Poster Dimension	962 / 642 / 1282 x1937x69mm OR 3.16 / 2.11 / 4.21 x6.35x0.23ft (Wider, Bigger & Show More)			
Weight (977/657/1297)	35 / 25 / 45 kg			
Refresh Rate (HZ)	1920 (3840Hz Optional)			
Frame Color	Red, Blue, Green, Yellow, White, Black			
Appearance Design	Elegant and Grand, Clean and Clear			
Service Access	Rear Service			
Protective Package	Flight Case 1-in-1, 2-in-1, 3-in-1, 4-in-1			
Control System	Media Player with 8G Capacity			
Poster PORT	USB, Config, Ethernet, WIFI, WIFI-St*, 4G*, HDMI in, HDMI out* (*Optional)			
Control Ways	APP in iOS/Android or Software in Windows			
PVC Cover	Slide installation* (*Optional)			
Grey Scale (bit)	16			
Viewing Angle (H/V)	140 / 140			
IP Rate	IP31			
Input Voltage (AC)	110 / 220			
Poster Usage	Advertising player, Information release, Guide purchase information, Support service, Publicity, Brand Demo, Notification			
Poster Application	Retail, Shopping Mall, Hall, Conference, Exhibition, Airport, Railway station, Metro, Cinema, Church, Supermarket, Property			

* Specifications and photos are subject to change without prior notice.

Wider, Bigger, Show More, Landscape 16:8

Portrait: 962mm wider, bigger, and show more for your advertising.

Landscape: close to 16:9 show your advertising in correct aspect ratio.



Other Narrow Poster

Poster

Audio & Music Integrated

An audio LED poster with power amplifier and speaker integrated

How to Control LPoster Plus?



LED Poster Usage

- ✓ Advertising player
- ✓ Information release
- ✓ Guide purchase information
- ✓ Support service
- ✓ Publicity
- ✓ Brand Demo
- ✓ Notification



High Brightness 5000, 2000, 1000nits

(Born for Retail Shop Window)

1000nits for Indoor, 2000nits face outside but in the shade, 5000nits face sunlight directly.



Poster 1000nits

Poster 2000nits

Poster 5000nits

Project Case



